



Redefine Anti-Glaring

Anti-glaring light is required more and more for applications where people doesn't feel comfortable with the glaring light, especially when the light were not very high. MILDBEAM is the ideal solution for visual protection. This increases the performance of staff and the quality of their work.



160LM/W

CB

TÜV Rheinland

ETL
LISTED
US


DLC
2015

FC

CE

RoHS
compliant


**Anti
Glaring**

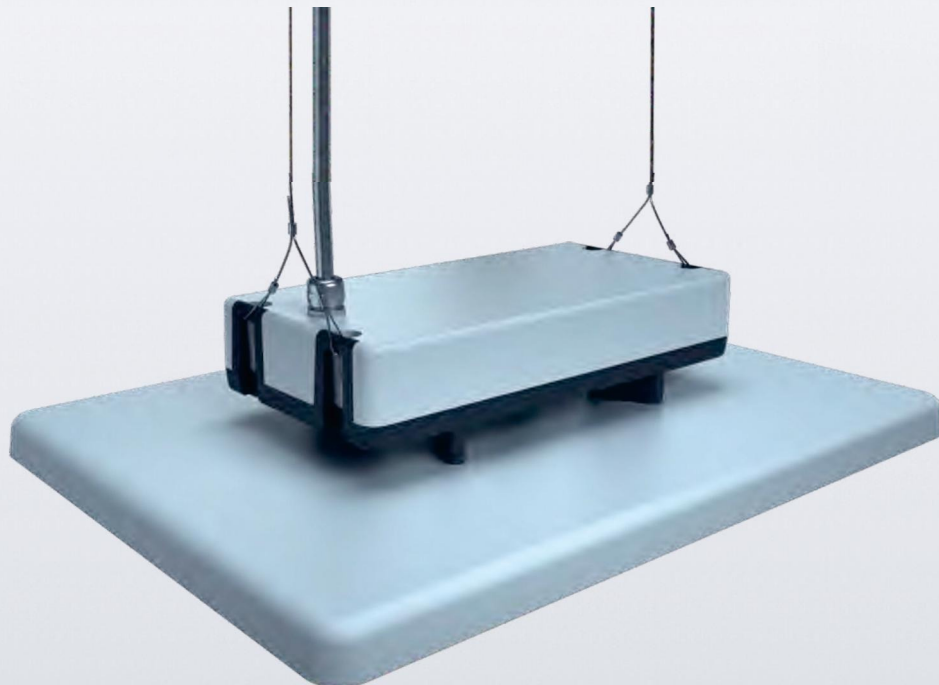


**160LM/W
UGR<21**

Advanced UGR technology

The Optics was specially developed to minimize glare and maximize homogeneity. With an anti-glaring film on the lens and a shield in front, we managed to achieve UGR<19

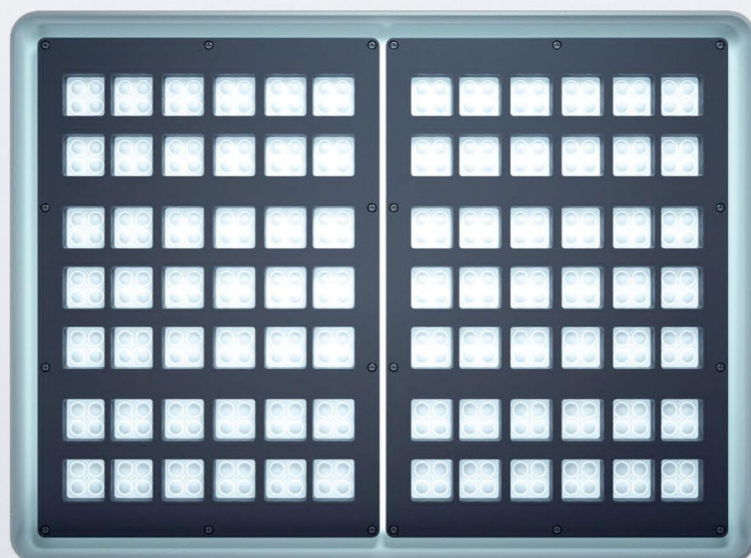

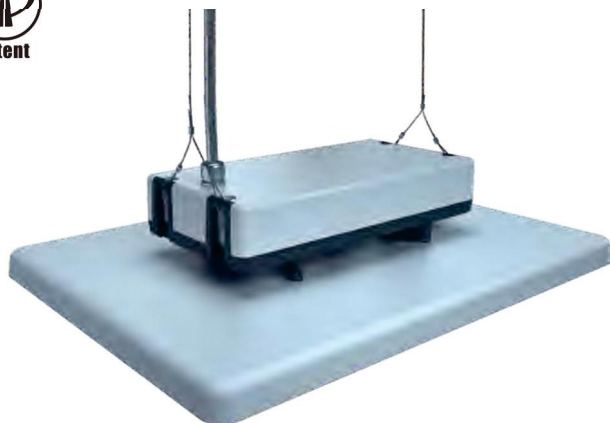


160LM/W

Features

Housing: Pure Aluminum
 Thermal Conductivity: 226 W/m·K
 Led: CREE JK 3030
 CRI: Ra>80
 SDCM: <6
 Power Factor: >0.95
 THD: <15
 Driver: Meanwell
 Driver Efficiency: >93%
 Protection: OTP, OCP, OVP, SCP
 Surge Protection: 10KV
 Waterproof: IP65
 Impact Test: IK10
 Electrical: 220-240V, 50/60Hz
 Operating Temperature: -40~50°C
 Tm21: L90B10>50,000H
 Lifetime: 50,000H


CM

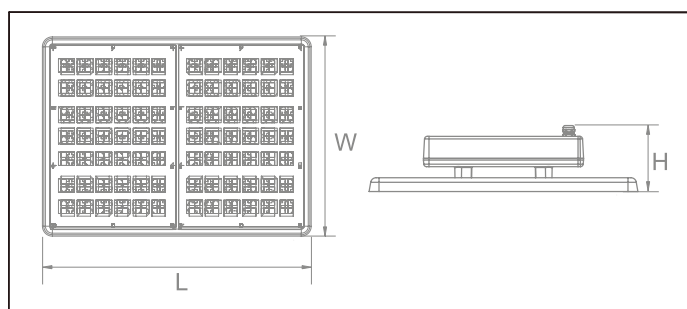


Functions

ZigBee · PWM · DALI · 0/1~10V · Micro-wave

Optical options:




Model	Watt	Voltage	Lumen	CRI	IP	Dimension
HB060ME2I-CM	60W	100~277V	9600LM	>80	IP65	L362*W257*H120MM
HB100ME2I-CM	100W	100~277V	16000LM	>80	IP65	L362*W257*H120MM
HB120ME2I-CM	120W	100~277V	19200LM	>80	IP65	L415*W310*H120MM
HB150ME4I-CM	150W	100~277V	24000LM	>80	IP65	L487*W362*H120MM
HB200ME4I-CM	200W	100~277V	32000LM	>80	IP65	L487*W362*H120MM
HB300ME6I-CM	300W	100~277V	48000LM	>80	IP65	L720*W365*H130MM

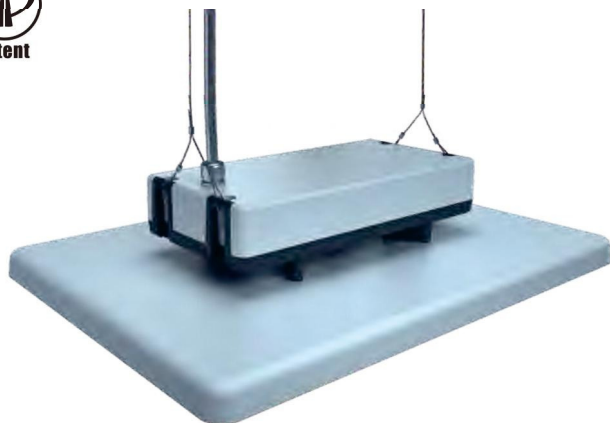

160LM/W

Features


Housing: Pure Aluminum
Thermal Conductivity: 226 W/m·K
Led: Philips
CRI: Ra>8
SDCM: <6
Power Factor: >0.95
THD: <15
Driver: Sosen
Driver Efficiency: >93%
Protection: OTP, OCP, OVP, SCP
Surge Protection: 4KV
Waterproof: IP65
Impact Test: IK10
Electrical: 100-277V, 50/60Hz
Operating Temperature: -40~50°C
Tm21: L90B10>50,000H
Lifetime: 50,000H

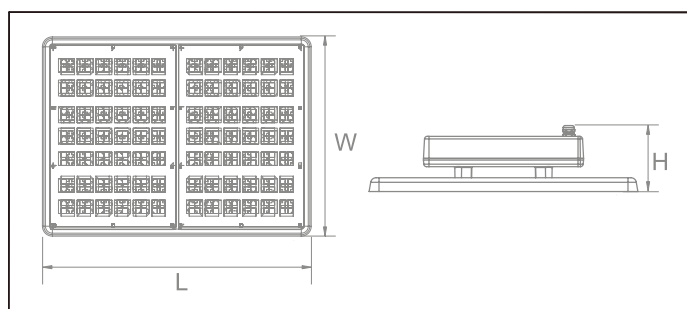


Functions

ZigBee · PWM · DALI · 0/1~10V · Micro-wave


Optical options:



Model	Watt	Voltage	Lumen	CRI	IP	Dimension
HB100ME2I-PY	100W	100~277V	16000LM	>80	IP65	L362*W257*H120MM
HB120ME2I-PY	120W	100~277V	19200LM	>80	IP65	L415*W310*H120MM
HB150ME4I-PY	150W	100~277V	24000LM	>80	IP65	L487*W362*H120MM
HB200ME4I-PY	200W	100~277V	32000LM	>80	IP65	L487*W362*H120MM
HB300ME6I-PY	300W	100~277V	48000L	>80	IP65	L720*W365*H130M
HB360ME6I-PY	360W	100~277V	M	>80	IP65	M
			54000L			L720*W365*H130M
			M			M

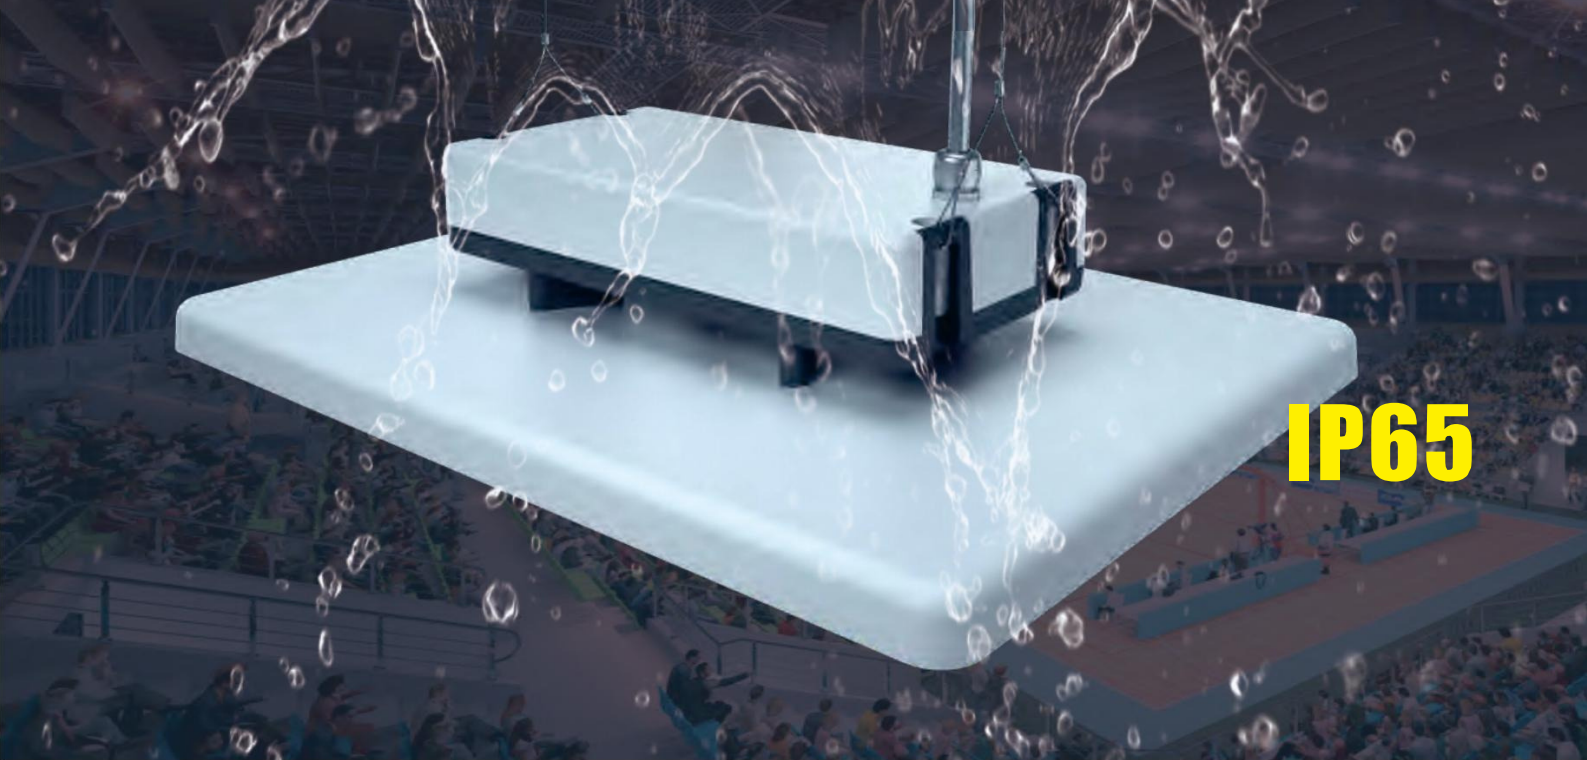

IP65

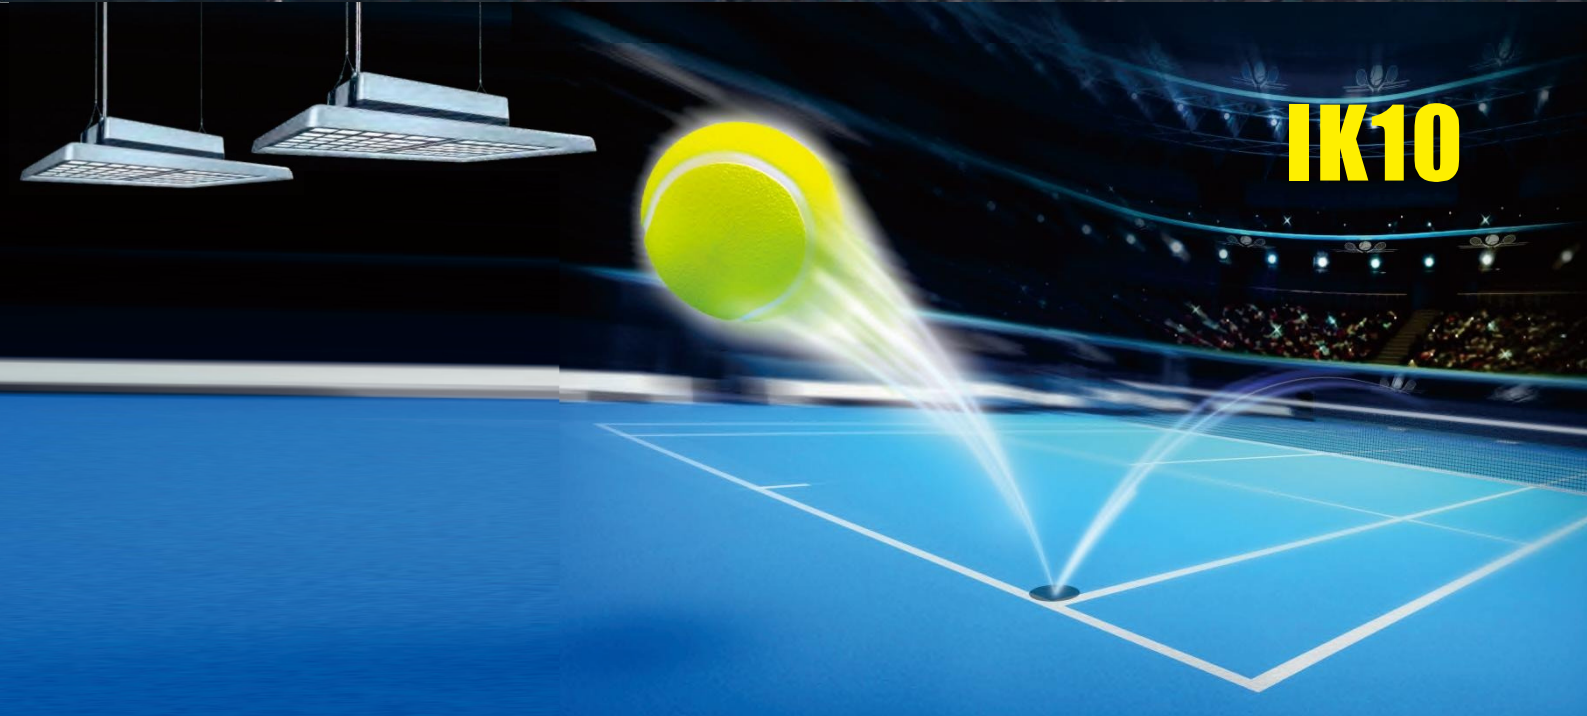

IK10



PERFECT FOR STADIUM