

SKU : 417347

SKU : 417460


SKU : 417453





Features



Housing: Die-cast
Thermal Conductivity: 96 W/m·K
Led: Philips
CRI: Ra>80 (90 for option)
SDCM: <6
Power Factor: >0.95
THD: <15
Driver: Sosen
Driver Efficiency: >93%
Protection: OTP, OCP, OVP, SCP
Surge Protection: 4KV
Waterproof: IP65
Impact Test: IK08
Electrical: 100-277V, 50/60Hz
Operating Temperature: -40~60 °C
TM21: L80B10>50,000H
Lifetime: 50,000H

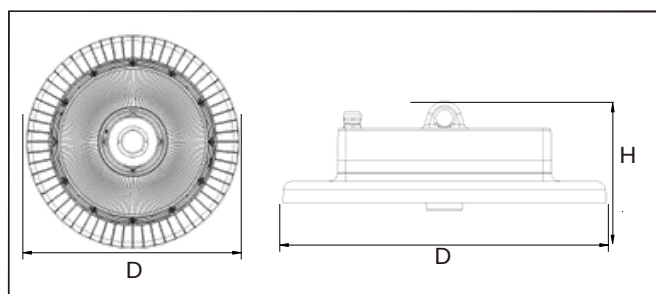

Functions

ZigBee · PWM 0/1~10V Micro-wave

Optical options:



160lm/w

5 YEARS WARRANTY


Sosen Driver

Philips LED

Model	Watt	Voltage	Lumen	CRI	IP	Dimension
HB100AE4I-	100W	100~277	16000L	>8	IP6	D380*H130m
PY	150W	V	M	0	5	m
HB150AE4I-	200W	100~277	24000L	>8	IP6	D380*H130m
PY	240W	V	M	0	5	m
HB200AE4I-		100~277	32000L	>8	IP6	D380*H130m
PY		V	M	0	5	m
HB240AE4I-		100~277	38400L	>8	IP6	D380*H130m
PY		V	M	0	5	m

Astronaut series


Packing

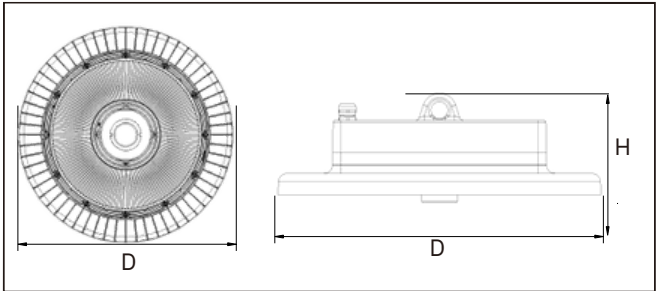


Model	Outer Carton(mm)			QTY / CTN	NW/CTN	GW/CTN
HB100AE4I-PY	45	45	17	1	2.5	3.7
HB150AE4I-PY	45	45	17	1	2.6	3.8
HB200AE4I-PY	45	45	17	1	2.7	3.9
HB240AE4I-PY	45	45	17	1	2.7	3.9
	0	0	0		0	0
	0	0	0		0	0
	0	0	0		0	0
	0	0	0		0	0



Standard Version



90° lens




110° Anti-glare Lens




Without Sensor

Plug-in Sensor Version



90° lens




110° Anti-glare Lens



Sensor Available

EUROPEAN DESIGN PATENT



PLUG-IN SENSOR

MOVEMENT DETECT



Range of exposure
120°

12m

18m

