



P/N: LI-THEA-FL200

Note:


LI = Brand Code

THEA = Product Series

FL = Product Name, LED FLOOD LIGHT

200 = Power,200W

DIMENSIONS

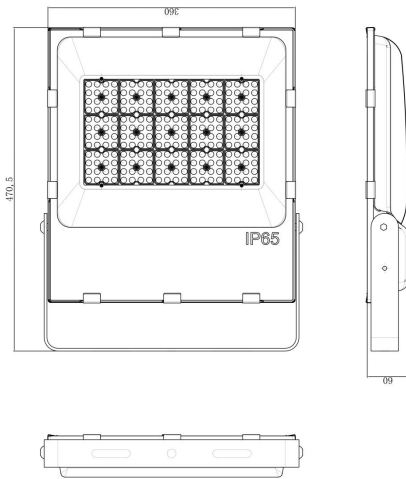

ADVANTAGE

- CE ROHS Certificate.
- IP67 driver, Input voltage 100-277VAC.
- No UV or IR in the beam.
- Easy to install and Operate.
- Energy saving, Long lifespan.
- Light is soft and Uniform, Safe to eyes.
- Instant start, NO flickering, NO humming.
- Green and eco-friendly without mercury.

APPLICATION

- Swimming Pool, Tennis Court;
- Airfield, Dock Field;
- Large Square hall;
- Highway Toll, Station etc.



SPECIFICATIONS

OPTICAL	Input Power	200W
	Lumen	24000LM
	Lumen Efficacy	120LM/W
	Viewing Angle	30° 60° 90° Type I 140*70° Type II 70*150° Type III 150*80° Type IV 50*140° optional
	Color Temperature	3000K,4000K,5000K, 5700K,6500K
	CRI	70RA or 80RA
ELECTRICAL	Input Voltage	100-277VAC 50/60Hz
	PF	≥0.95
	THD	≤15%
	Driver Model	Meanwell Or Inventronics Driver (0-10V/Dali Dimming Optional)
	Optional Accessory	Motion Sensor/Surge-Protective Device
MATERIALS	LED Type	SMD 3030 (1W)
	LED QTY	240 PCS
	Housing	Aluminum Alloy
	Housing Color	Any colors
	Cover	Clear PC Lens
	Waterproof Rating	Outdoor (IP66)
OTHERS	Operating Temperature	-40℃ TO 50℃
	Operating Humidity	10%-90% RH
	Storage Temperature	-40℃ TO 80℃
	Storage Humidity	10%-95% RH
	Warranty Time	5 Years

PACKAGE

	Size	Qty / Carton	Lamps Net Weight	Weight/ Carton
Carton box	56*46*16cm	1PC	5.5KG	6.5KG

